

# iLoad Pro Digital USB™ Integrated Load Cell

The iLoad Pro Digital USB load cells offer direct measurement of static loads via the USB port of a PC. No need for signal conditioners, data acquisition systems or special software. Just connect and start measuring! The iLoad Pro Series offers greater ruggedness, better mounting and cable strain relief for more demanding applications.

## Highlights

### Capacitive Load Cell Technology

- Plug and Sense Simplicity
- Digital Integrated Electronics
- Standard USB output
- Power supplied via USB port
- Integrated power conditioning
- Stored calibration

### Rugged Construction

- Compact design with low profile
- Stainless steel construction
- Mechanically robust
- Weather resistant packaging available

### Easy Attachments

- Convenient, robust mounting on top and bottom of sensor
- Self balancing multiple point support on base
- Optional Tension Adapter available

### Multiple Load Cell Capacities

- iLoad Pro Digital 50 lb.
- iLoad Pro Digital 100 lb.
- iLoad Pro Digital 250 lb.
- iLoad Pro Digital 500 lb.
- iLoad Pro Digital 1,000 lb.
- iLoad Pro Digital 2,500 lb.
- iLoad Pro Digital 5,000 lb.
- iLoad Pro Digital 10,000 lb.

Use in either compression or tension mode

## Overview

Loadstar's iLoad Pro Digital USB Series provides unprecedented integration of sensing and measurement electronics to provide Plug and Sense™ simplicity for load and force measurements.

### Load Sensing Made Easy!



**Precise**  
Accuracies to 0.15% of full scale.



**Rugged**  
Stainless steel construction.  
Optional environmental protection.



**True USB**  
No need for signal conditioning or data acquisition system.  
Optional analog output (0.5 - 4.5 V DC).



**Easy Mounting**  
Threaded mounting holes for easy attachment using standard fixtures.



## Here's How It Works



iLoad Pro Digital USB

### 1 Sense

### 2 View & Process LoadVUE, LoadVUE Lite

Simply connect the digital load cell to a PC via the USB port. The digital load cell appears on the PC as a virtual COM port. Using a standard terminal emulator, send commands to the sensor to directly display sensor outputs in pounds as ASCII text. You can query loads one reading at a time or get a continuous stream of readings. Alternatively, use our application (LoadVUE or LoadVUE Lite) to simplify load and force measurements. You can easily get load data into your custom application using our simple ASCII command set with real load information in ASCII format.


## Suggested Configuration



USB




USB



# iLoad Pro Digital USB Integrated Load Cell

## Dimensions

Capacity	50lb.	100lb.	250lb.	500lb.	1,000lb.	2,500lb.	5,000lb.	10,000lb.
A	3.25 in.							4 in.
B	#½-20 UNF-2B							#⅞-14 UNF-2B
C	0.4 in.							0.75 in.
D	0.89 in.	0.94 in.	0.97 in.	1.05 in.	1.25 in.	1.25 in.	1.69 in.	1.57 in.
E	0.85 in.	0.85 in.	0.85 in.	0.85 in.	0.85 in.	0.85 in.	1.25 in.	1.25 in.
F	1.16 in.	1.16 in.	1.16 in.	1.16 in.	1.2 in.	1.2 in.	1.72 in.	1.72 in.
G	0.66 in.	0.66 in.	0.66 in.	0.66 in.	0.7 in.	0.7 in.	0.90 in.	0.90 in.
H	3							6
I	#10-32 UNF-2B							#¼-20 UNC-2B
J	0.4 in.							0.5 in.
K	2.96 in.							3.44 in.
L	120°							60°

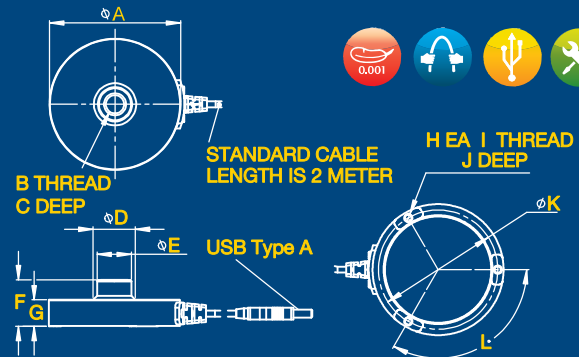

## Load Cell Specifications

Accuracy w/tare (% of FS)	Non-linearity	Hysteresis	Non-repeatability
50, 100, 250, 500 lb.	±0.15 %	±0.15 %	±0.15 %
1,000, 2,500 lb.	±0.25 %	±0.25 %	±0.25 %
5,000 lb.	±0.50 %	±0.50 %	±0.50 %
10,000 lb.	±1 %	±1 %	±1 %
Data Update Rate	150 Hz		
Response Rate	10 Hz (40 Hz available)		

### Mechanical

Safe Overload	to 150% of capacity
Deflection	0.003-in typical at rated capacity
Sensor Size	3.25 to 4-in. OD, 1.15 to 1.72-in thick top-to-bottom

### Electrical

Input Power	Input power from USB Digital Output - USB 2.0 (5V at 60mA)
-------------	--

### Environmental

Creep, in 20 min	±0.03 % of full scale
Operating Temperature Range	10°C to 40°C, non-condensing
Temperature Effect on Span	up to ±0.05 % full scale/°C (from calibration temperature)

### Connections

Mating Cable	USB 5-pin mini-B to male USB-A 6' long included Optional 10' cable available Optional 16' active extender cable available (LX-100)
--------------	--

### Alternative Load Cell Configurations


With Inline Adapter (TX-325)



With Inline Adapter (TX-325) & Rod Ends (RE-325)



With Load Button (LB-325)




## Suggested Use



- 5 Pin**
1. 5V DC
  2. DATA -
  3. DATA +
  4. No Wiring\*
  5. Ground

\*Optional Analog Output

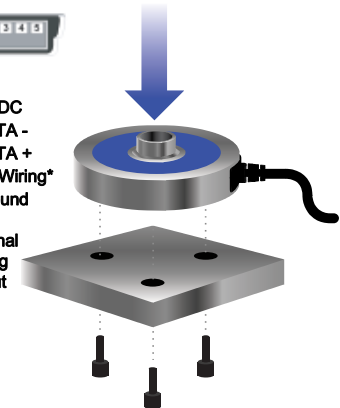

The load cell is circular with a female threaded mounted surface at the top of the load cell. The flat bottom surface has multiple stepped areas with tapped mounting holes. Mount the load cells on a flat surface and apply loads perpendicular to the sensor body. Off-center or laterally-applied loads will greatly affect accuracy. Avoid side loads and twisting loads. Use under steady temperature conditions for best results.

## Certifications



Prodynamics GmbH

Adalbertstraße 63  
60486 Frankfurt am Main  
Fon: 069.70790850  
Fax: 069.70790851  
URL: [www.prodynamics.com](http://www.prodynamics.com)  
Email: [info@prodynamics.com](mailto:info@prodynamics.com)

**Disclaimer and Legal Information:** Information in this document is provided in connection with Loadstar Sensors products. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Loadstar Sensors assumes no liability whatsoever, and Loadstar Sensors disclaims any express or implied warranty, relating to sale and/or use of Loadstar Sensors products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright or other intellectual property right. Loadstar Sensors products are not intended for use in medical, life saving, or life sustaining applications. The information in this document is furnished for informational use only, is subject to change without notice, and should not be construed as a commitment by Loadstar Sensors. Loadstar Sensors assumes no responsibility or liability for any errors or inaccuracies that may appear in this document or any software that may be provided in association with this document. Loadstar Sensors reserves the right to make changes to its products at any time in the future. The specifications mentioned in this document are provided as guidelines only and may change in the future to reflect changes in design and availability of better test data. Actual results may vary depending on the nature of the application and the conditions under which the sensors are used. Copyright © Loadstar Sensors, Inc. 2005-2009.